


TFV : for very narrow components
packaged in plastic sticks

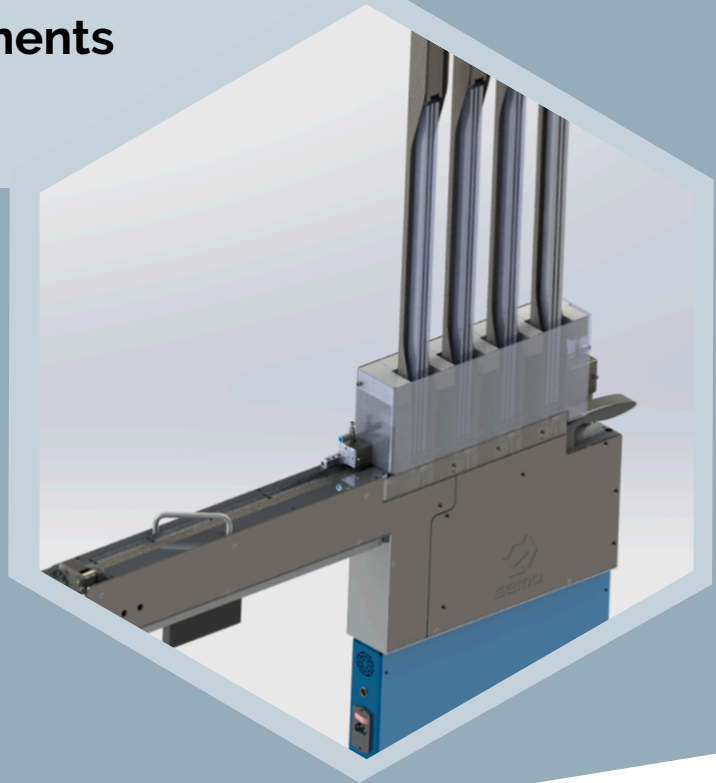

Width : 80 mm

Length : 1043 mm (533 out table)

Weight : 24 kg

GENERAL CONCEPT

- ▶ Reliable and stable feeding of very narrow parts for the highest OEE
- ▶ Shortest stick feeder on the market
- ▶ Simple mechanical systems
- ▶ Loading of full sticks and unloading of empty sticks while feeding parts (no impact on production)

Power supply : 110/220 Vac -
50/60 Hz

Air supply : 5 / 7 bar

DID YOU KNOW ?



What to do when your component is discontinued ?

SEMO Feeders can be recycled

We can reconfigure to new components, test, upgrade and provide the new full warranty: **a new life for your feeder and some savings for you**



INTEGRATION FOR MULTIPLE MANUFACTURERS

- Possible integration with many pick-and-place machines
- SEMO feeders can communicate with pick-and-place machines or can function manually for tests and maintenance.



CHARACTERISTICS

- ▶ **Automatic startup with cycle time** < 1.5s
- ▶ **Lengths of sticks** : 500 mm to 600 mm maximum
- ▶ **Number of sticks** : 4
- ▶ **Stick replenishment without stopping production**
- ▶ **Repeatability of positioning** : < 0.1 mm
- ▶ **SEMO Tube Feeder can be mounted on a changeover table every 80mm**
- ▶ **Optional communication for optimal synchronization with pick and place machine**
- ▶ **A mobile crutch supports the feeders weight once mounted on a placement machine**
- ▶ **Reconfigurable** if you need to convert your feeder to another component

ACCESSORIES

Trolley :

- ▶ To handle feeders
- ▶ Electrical/Pneumatic connections plate
- ▶ Storage box with four drawers
- ▶ Additional storage interface

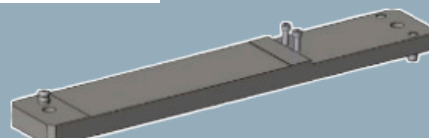

+33 5 61 85 55 77
semo@semo.fr
10 rue Louis Breguet,
31700 Cornebarrieu, FRANCE

